


- „True OFF” relay - relay timing without supply voltage
- Sample of use: back-up source for Delay OFF in case of voltage failure (emergency lighting, emergency respirator, or protection of el. controlled doors - in case of fire)
- 2 time functions adjustable by rotary switch:
  - a - Delayed return after disconnecting of supply
  - e - Delayed start
- Time range (adjustable by rotary switch and fine setting by potentiometer): 0.1 s - 10 min
- Universal supply voltage AC/DC 12 - 240 V
- Output contact: 2x changeover/DPDT 8 A
- Output status indicated by LED (only in case of supply voltage connection)
- Clamp terminals
- 1-MODULE, DIN rail mounting


EAN code  
CRM-82T0 /UNI: 8595188137614

Technical parameters	CRM-82T0
Number of functions:	a - On Delay (Power On)/ e - Off Delay (S Break)
Supply terminals:	A1 - A2
Voltage range:	AC/DC 12 - 240 V (AC 50 - 60 Hz)
Burden:	AC 0.7 - 3 VA / DC 0.5 - 1.7 W
Supply voltage tolerance:	-15 %; +10 %
Supply indication:	green LED
Time ranges:	0.1 s - 10 min
Time setting:	potentiometer
Time deviation:	5 % - mechanical setting
Repeat accuracy:	0.2 % - set value stability
Temperature coefficient:	0.01 % / °C, at = 20 °C ( 0.01 % / °F, at = 68 °F)
<b>Output</b>	
Number of contacts:	2x changeover/SPDT (AgNi/ Silver Alloy)
Current rating:	8 A / AC1
Breaking capacity:	2000 VA / AC1, 192 W / DC
Inrush current:	10 A / <3 s
Switching voltage:	250 V AC1 / 24 V DC
Min. breaking capacity DC:	500 mW
Output indication:	red LED
Mechanical life:	3x10 <sup>7</sup>
Electrical life (AC1):	0.7x10 <sup>5</sup>
<b>Other information</b>	
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (supply-output)
Mounting/DIN rail:	DIN rail EN 60715
Protection degree:	IP 40 from front panel / IP 10 terminals
Operating position:	any
Overvoltage category:	III.
Pollution degree:	2
Max. cable size(mm <sup>2</sup> ):	solid wire max. 2x2.5 or 1x4 ( AWG 12 ) with sleeve max. 2x1.5 or 1x2.5 ( AWG 12 )
Dimensions:	90 x 17.6 x 64 mm (3.5" x 0.7" x 2.5")
Weight:	93 g (3.3 oz.)
Standards:	EN 61812-1, EN 61010-1

## Symbol Connection

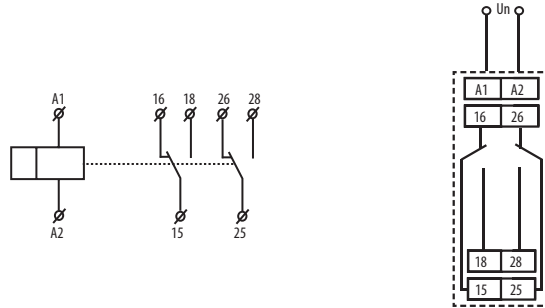

## Description

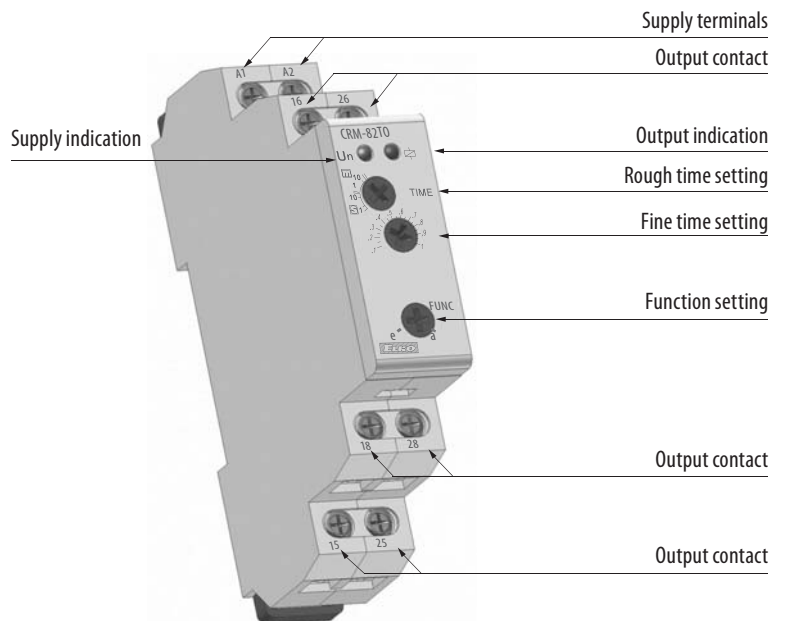

## Function

a - Delay OFF (S break) the power supply is switched off (min. time is 0.5 s)



e - Off Delay (S break)

