

EAN code


SHT-1 /230V: 8595188130424
 SHT-1 /UNI: 8595188130431
 SHT-1/2 /230V: 8595188130400
 SHT-1/2 /UNI: 8595188130417
 SHT-3 /230V: 8595188136761
 SHT-3 /UNI: 8595188136754
 SHT-3/2 /230V: 8595188129015
 SHT-3/2 /UNI: 8595188129046

- Controls various appliances in real time; daily, weekly, monthly and yearly up to 2095
- Switching: according the program (AUTO)/constantly manually, manually to next program change/random (CUBE)
- “Holiday program” option will block the devices standard program
- Automatic conversion summer / winter time
- Sealable cover of front panel, easy controlling via 4 buttons
- 100 memory places, clear LCD display, min. interval 1 s
- Voltage range: AC 230 V or AC/DC 12-240 V
- Cyclic output
- Pulse output
- SHT-1, SHT-3: one channel version, 2-MODULE, DIN rail mounting, clamp terminals
- SHT-1/2, SHT-3/2: two channel version, 2-MODULE, an individual program can be run on each channel


	Output		Time programm			
	1 channel	2 channel	day	week	month	year
SHT-1	●		●	●		
SHT-1/2		●	●			
SHT-3	●		●	●	●	●
SHT-3/2		●	●	●	●	●

Technical parameters	SHT-1, SHT-3	SHT-1/2, SHT-3/2
Supply terminals:	A1 - A2	
Voltage range:	AC/DC 12 - 240 V (AC 50 - 60 Hz)	
Burden:	UNI	AC 0.5 - 2 VA / DC 0.4 - 2 W
Voltage range:	230	AC 230 V / 50 - 60 Hz
Burden:		AC max. 14 VA / 2 W
Supply voltage tolerance:	-15 %; +10 %	
Back-up supply:	yes	
Summer/winter time:	automatic	
Output		
Number of contacts:	1x changeover/SPDT (AgSnO ₂)	2x changeover/DPDT (AgSnO ₂)
Current rating:	16 A / AC1	
Breaking capacity:	4000 VA / AC1, 384 W / DC	
Inrush current:	30 A / <3 s	
Switching voltage:	250 V AC1 / 24 V DC	
Min. breaking capacity DC:	500 mW	
Mechanical life:	3x10 ⁷	
Electrical life (AC1):	0.7x10 ⁵	
Time circuit		
Power back-up:	up to 3 years	
Accuracy:	max. ±1s/ day at 23 °C (73.4 °F)	
Minimum interval:	1 min	
Data stored for:	min. 10 years	
Cyclic output:	1-99s	
Pulse output:	1-99s	
Program circuit		
Number of memory places:	100	
Program (SHT-1; SHT-1/2):	daily, weekly	
Program (SHT-3; SHT-3/2):	daily, weekly, monthly, yearly (up to year 2095)	
Data readout:	LCD display, with back light	
Other information		
Operating temperature:	-20 °C to +55 °C (-4 °F to 131 °F)	
Storage temperature:	-30 °C to +70 °C (-22 °F to 158 °F)	
Electrical strength:	4 kV (supply - output)	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP 10 clips, IP 40 from front panel	
Overvoltage category:	III.	
Pollution degree:	2	
Max. cable size (mm ²):	solid wire max. 2x2.5 or 1x4 (AWG 12) with sleeve max. 1x2.5 or 2x1.5 (AWG 12)	
Dimensions:	90 x 35.6 x 64 mm (3.5" x 1.4" x 2.5")	
Weight:	(UNI) - 130 g (4.6 oz.), (230) - 110 g (3.9 oz.) (UNI) - 143 g (5.0 oz.), (230) - 125 g (4.4 oz.)	
Standards:	EN 61812-1, EN 61010-1	


Symbol

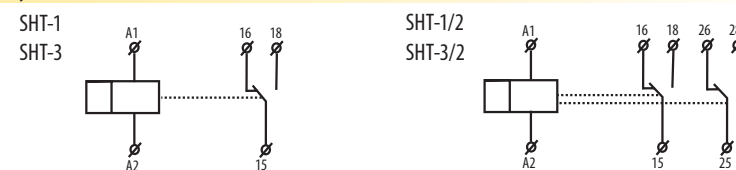

Connection

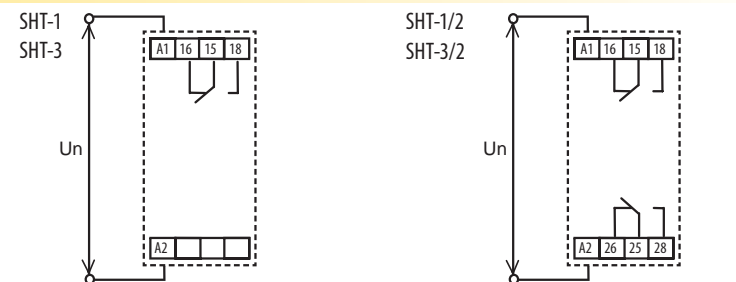

Description of visual elements on the display

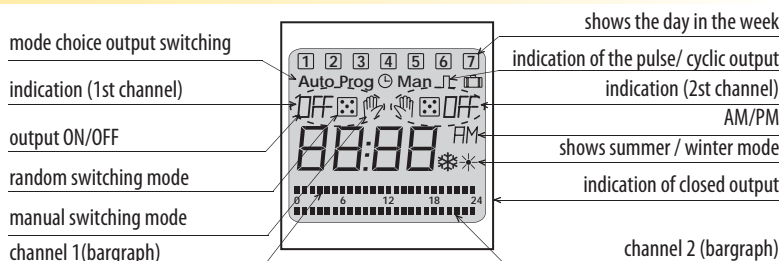

Description

