




	TLX 2251	TLX 2259	TLX 2356	TLX 2357	TLX 2358	TLX 2360	TLX 2654	TLM 2253	TLM 2257	TLM 2402	TLM 2453	TLM 2457	TLM 2628	TLM 2655	TLM 2802
	217 2251	217 2259	217 2356	217 2357	217 2358	217 2360	217 2654	219 2253	219 2257	219 2402	219 2453	219 2457	219 2628	219 2655	219 2802
Current Rating (amps)	1	6(2)	6(2)	6(2)	6(2)	6(2)	6(2)	20(9)	20(9)	20(9)	20(9)	20(9)	20(9)	20(9)	20(9)*
Temperature Range [°C]	3/27	3/27	3/27	3/27	3/27	0/15	3/27	3/27	-15/10	3/27	3/27	-15/10	3/27	3/27	10/40
Changeover contacts (SPDT)			✓	✓	✓										✓
Tamperproof **					✓	✓	✓			✓	✓	✓		✓	
Operating voltages (±10%)	24	230	230	230	230	230	230	230	230	230	230	230	230	230	230
Accelerator Heater	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Heating Applications Only	✓	✓				✓	✓	✓	✓	✓	✓	✓	✓	✓	
Heating & Cooling Applications			✓	✓	✓										✓

\* The changeover back contact of the TLM 2802 is rated at 5A (resistive)

\*\* All tamperproof models are supplied with shear-off screws

General Specification	
Pack Size (mm)	42 x 88 x 50
Pack Weight (g)	200
European Standards	EN60730-2-7
European Directives	CE Mark
	WEEE & RoHS Compliant

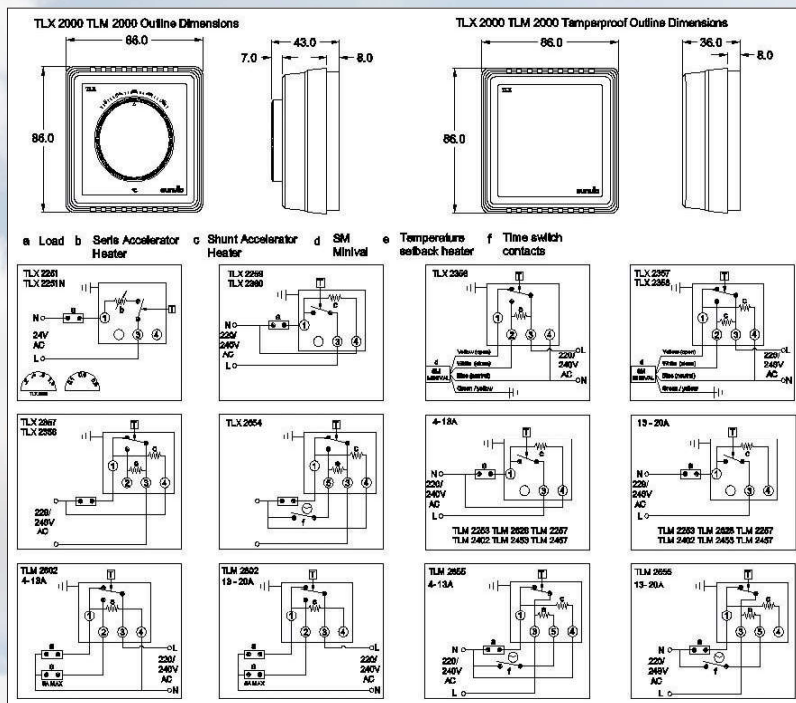

SF\_225\_0000\_Dsc13